

Capillary Thermostat FGCP 101 / FGCP 102



Type	FGCP 101 Capillary thermostat, normally closed contact FGCP 102 Capillary thermostat, changeover contact
Switching capacity	100 - 230 V ~ 10 A (2 A) In DC operation, 30 W maximum power
Control ranges	0°C to 60°C (other ranges available by request. -20°C to 40°C; 20°C to 80°C)
Hysteresis	< 7 K
Switching tolerance	+/- 3 K
Capillary	Probe 6 x 80 mm, capillary 1500 mm
Connection	2,5mm ² , screw terminals
Weight	Approx. 70 g
Storage temperature	-20°C to +65°C
Ingress protection	IP 20
Mounting	DIN-Rail
Housing	UL94 plastic V - O
Dimensions	L 46 x W 37 x H 64 mm
Approvals	VDE, UL

Application


Temperature control in electrical cabinets, ticket and vending machines to assist in the protection of electronic circuitry and mechanical components.

Features

- Simple mounting on a DIN EN 60715 compliant standard rail (35 mm profiled rail)
- Space-saving compact size
- High switching capacity
- Dial adjusts in small increments to protect against accidental misadjustment

Note: In order to reach the protection class the probe of capillary thermostats must be directly connected to the protective earth conductor

Connection Diagram

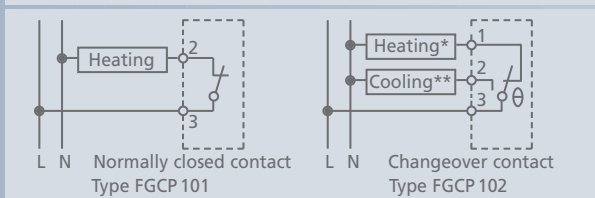

* In cooling mode indicator contact

** In heating mode indicator contact

DBK David+Baader GmbH

Components

Rheinstrasse 72 - 74
D - 76870 Kandel

Phone: + 49 (0) 72 75 7 03 - 231
Fax: + 49 (0) 72 75 7 03 - 249

info@dbk-group.de
www.dbk-components.com