



Nimbus P

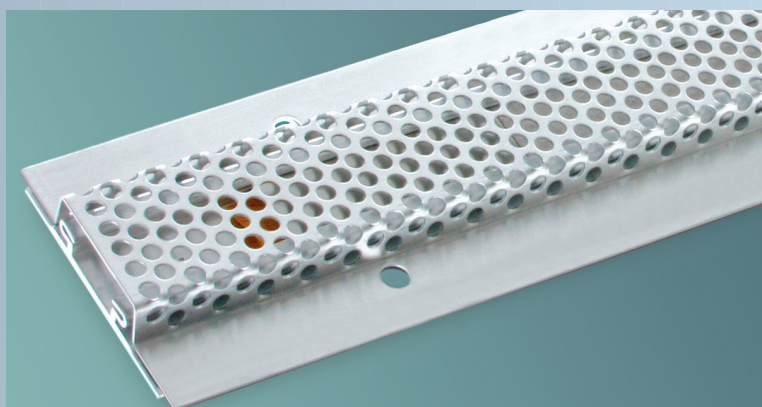

Nimbus P		250	340	400
Rated power at 10° C (free in air)	[W]	70	95	110
Profile temperature (approx.)	[°C]	200	200	200
Max. achievable power with good thermal contact	[W]	250	280	300
Voltage range		110 - 240 V, AC/DC		
Protection class		II		
System of protection		IP 20		
Connection cable 2 x 0,75 mm ² , silicone		500 mm long		
Fixing		Fixing holes		
Approvals		VDE, UL, CSA		
Dimensions	LxWxH [mm]	250x70x18	340x70x18	400x70x18
Weight	[kg]	0,2	0,31	0,38
Recommended fuse (time delay)	240 V	10 A	10 A	10 A
	110 V	6,3 A	6,3 A	6,3 A

Ordering Example: Nimbus P 340, 95 W, 110-240 V

Special designs are possible on request. For example: 12 - 24 V or 400 V.

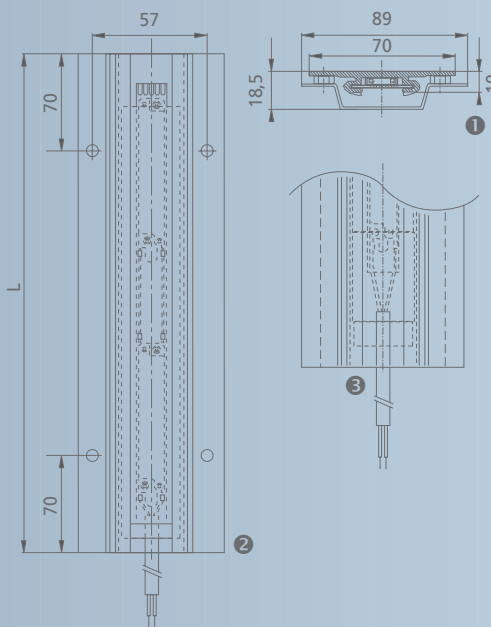

Special Features

- Flat design
- Large contact surface
- With touch protection
- The max. achievable power results from a direct screw fixing to an assembly plate
- The touch protection must be mounted to the heater with a spacer of min. 5 mm to reduce the temperature

- ① Cross section with touch protection
- ② Aluminium profile without touch protection
- ③ Silicone cable 2 x 0,75 mm²

DBK David+Baader GmbH

Components

Rheinstrasse 72 - 74
D - 76870 Kandel

Phone: + 49 (0) 72 75 7 03 - 231
Fax: + 49 (0) 72 75 7 03 - 249

info@dbk-group.de
www.dbk-components.com